



PERFORMANCE BULLETIN

Engine: Yamaha VF200LA

Boat: Xpress® H22 Bay®

Configuration: Single

Test Date: 19-Apr-2011




PERFORMANCE DATA

RPM	MPH	GPH	MPG
1000	5.5	1.4	3.93
1500	7.3	2.2	3.32
2000	8.8	3.2	2.75
2500	14.8	4.1	3.61
3000	27.6	5.6	4.93
3500	33.3	7.3	4.56
4000	38.8	9.4	4.13
4500	43.4	12.1	3.59
5000	49	13.9	3.53
5500	55.6	17.8	3.12
5950	59.6	18.1	3.29

Seconds to Plane: 2.35

Seconds 0-30 MPH: 5.18

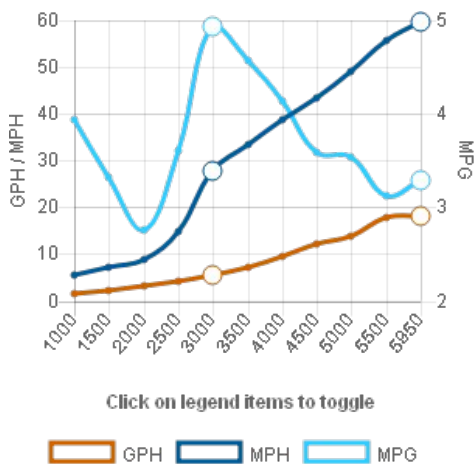

NOTICE TO CONSUMER

The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Please also keep in mind that the data contained in this Performance Bulletin may or may not have been performed using Yamaha PowerMatched components. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



XPRESS® H22 BAY®

Length	22' 3"
Beam	8' 1"
Dry Weight (Boat Mfr. Pub)	1,709 lbs
Maximum HP	225 hp
Fuel Capacity	44.00 gal
Weight as Tested	3,011 lbs

VF200LA

Horsepower	200 hp
Displacement	4.2 L
Weight (Estimated)	505 lbs
Gear Ratio	1.75

ENGINE MOUNTING HEIGHT

Mounting Hole Position	#3
Anti-Ventilation Plate Height	Adjustable Hydraulic Plate

PROPELLER(S)

Series	Pro™ Series
Diameter x Pitch	14 1/2" x 21"
Yamaha Part #	6J9-45976-10-00
Propeller Material	Polished Stainless Steel

TEST CONDITIONS

Number of People	2
Air / Water Temperature (Fahrenheit)	81° F / 64° F
Elevation (in feet above sea level)	301'
Wind Velocity	10-15 MPH

COMMENTS

Test weight includes 1/2 tank of fuel, 3 batteries, bow-mounted trolling motor, 6" jack plate, safety and test equipment. Fuel consumption data gathered with Yamaha Command Link® fuel management system. Zero-to-30 speed data gathered with aftermarket speedometer. Other speed data gathered with GPS receiver.

YPB#: PB_XPR_H22Bay_VF200LA_2011-04-19_ALM

Boat Manufactured By:

Xpress
199 Extrusion Place • Hot Springs, AR
(501) 262-5300

www.xpressboats.com (<http://www.xpressboats.com>)

