



PERFORMANCE BULLETIN

Engine: Yamaha F150TXR /

LF150TXR

Boat: River Hawk® 27

Offshore®

Configuration: Twin

Test Date: 4-Nov-2011




PERFORMANCE DATA

RPM	MPH	GPH	MPG
1000	5.5	1.4	3.93
1500	7.5	2	3.75
2000	9	3.8	2.37
2500	12.3	6	2.05
3000	18.1	8.4	2.16
3500	25.6	11.4	2.25
4000	31.1	13.1	2.37
4500	35.7	16.6	2.15
5000	40.2	20.2	1.99
5500	44.4	27.6	1.61
5900	47.1	33.2	1.42

Seconds to Plane: 4.51

Seconds 0-30 MPH : 8.39

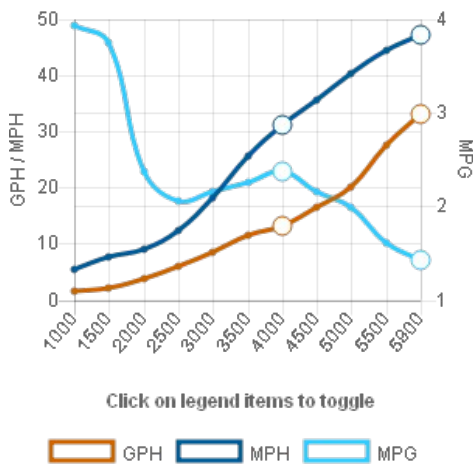

NOTICE TO CONSUMER

The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Please also keep in mind that the data contained in this Performance Bulletin may or may not have been performed using Yamaha PowerMatched components. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

RIVER HAWK® 27 OFFSHORE®

Length	27' 0"
Beam	9' 6"
Dry Weight (Boat Mfr. Pub)	5,200 lbs
Maximum HP	350 hp
Fuel Capacity	100 gal
Weight as Tested	7,548 lbs

F150TXR / LF150TXR

Horsepower	150 hp
Displacement	163 cu. in.
Weight (Estimated)	487 lbs
Gear Ratio	2

ENGINE MOUNTING HEIGHT

Mounting Hole Position	#3
Anti-Ventilation Plate Height	1.5" Above Boat Bottom

PROPELLER(S)

Series	Reliance® Series
Diameter x Pitch	14 1/4 x 18
Yamaha Part #	68F-45978-00-00
Propeller Material	Polished Stainless Steel

TEST CONDITIONS

Number of People	2
Air / Water Temperature (Fahrenheit)	65° F / 60° F
Elevation (in feet above sea level)	276'
Wind Velocity	5-10 MPH

COMMENTS

Test weight includes 3/4 tank of fuel, 4 batteries, optional cabin heater, optional refrigerator, safety and test equipment. Fuel consumption data gathered with Yamaha Command Link® fuel management system. Zero-to-30 speed data gathered with Yamaha speedometer. Other speed data gathered with GPS receiver.

YPB#: PB_RVR_27Offshore_t_F150TXR_2011-11-04_ALM

Boat Manufactured By:

River Hawk
682 Brian Way • Medford, OR
(320) 632-5481

www.riverhawkboats.net (<http://www.riverhawkboats.net>)

