



PERFORMANCE BULLETIN

Engine: Yamaha VF250LA V

MAX SHO®

Boat: Skeeter® FX21 LE

Configuration: Single


Test Date: 6-Jul-2016



PERFORMANCE DATA

RPM	MPH	GPH	MPG
1000	5.6	1.5	3.73
1500	7.2	2.9	2.51
2000	8	4.5	1.79
2500	9.8	6.6	1.49
3000	32.4	7	4.66
3500	38.5	10.1	3.81
4000	45.6	13.3	3.43
4500	51.9	16.9	3.08
5000	59.6	20.3	2.94
5500	66.4	22.2	3
5900	70.3	23	3.06

0-30 MPH: 8.61

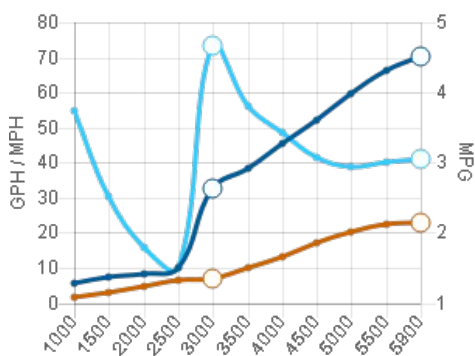

Click on legend items to toggle

■ GPH ■ MPH ■ MPG

NOTICE TO CONSUMER

The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Please also keep in mind that the data contained in this Performance Bulletin may or may not have been performed using Yamaha PowerMatched components. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



SKEETER® FX21 LE

Length	20' 11"
Beam	7' 11"
Dry Weight (Boat Mfr. Pub)	2,185 lbs
Maximum HP	250 hp
Fuel Capacity	48 gal
Weight as Tested	3,753 lbs

VF250LA V MAX SHO®

Horsepower	250 hp
Induction	EFI
Displacement	4.2 L
Weight (Estimated)	505 lbs
Gear Ratio	1.75

ENGINE MOUNTING HEIGHT

Mounting Hole Position	#3
Ventilation Plate Height	1 3/4" Inside Over Outside Plate
Jack Plate	12" Manual

PROPELLER(S)

Series	V MAX SHO®
Diameter x Pitch	15 1/8 x 25
Yamaha Part #	6CB-45972-00-00
Propeller Material	Polished Stainless Steel

TEST CONDITIONS

Number of People	2
Air / Water Temperature (Fahrenheit)	84° F / 85° F
Elevation (in feet above sea level)	396'
Wind Velocity	10-15 MPH

COMMENTS

Test weight includes 48 gallons of fuel, 4 batteries, bow-mounted trolling motor, battery charger, dual 8-foot Power-Poles, 12" manual jack plate, safety and test gear.

YPB#: PB_SKT_FX21LE_VF250LA_2016-07-06_BSS

Boat Manufactured By:

Skeeter
One Skeeter Road • Kilgore, TX
(903) 984-0541

www.skeeterboats.com (<http://www.skeeterboats.com>)

